


BPW BRAKED AND TRAILING AXLE STUB.

BPW axle stubs have the same product features as the complete BPW axles. At the same time, they offer greater flexibility for individual complex applications such as work machines or vehicles with excessively wide track.

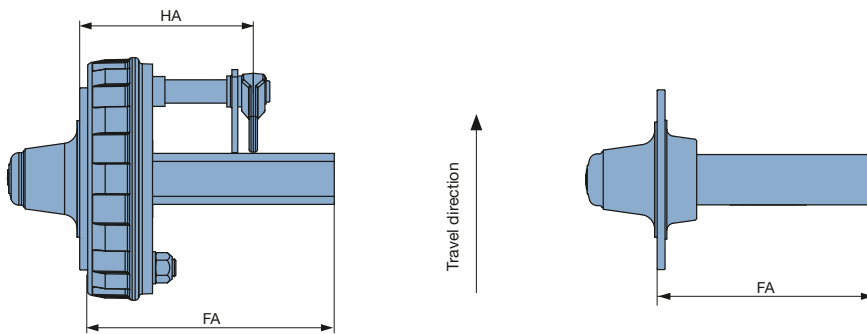

Axle cross-section (mm)	Axle type	FA (mm)	HA (mm)	Wheel brake	Wheel connection	Static axle load (kg)						BPW code number
						25 km/h			40 km/h			
						○	○ ○	○○	○	○ ○	○○	

Moving axle stub GS-ST without brake

60	GS-ST 4006	300	-	-	6/205/160 M 18 x 1,5	4,500	3,800	-	4,200	3,500	-	58.56.001.600
70	GS-ST 5506	300	-	-	6/205/160 M 18 x 1,5	7,000	6,000	5,500	6,500	5,500	5,000	58.63.001.600
70	GS-ST 5508	300	-	-	8/220/275 M 20 x 1,5	7,000	6,000	5,500	6,500	5,500	5,000	58.63.001.601
80	GS-ST 7008	350	-	-	8/220/275 M 20 x 1,5	9,000	7,500	7,000	8,000	7,000	6,500	58.67.001.600
90	GS-ST 8008-3	350	-	-	8/220/275 M 20 x 1,5	11,000	9,500	8,500	10,000	8,500	8,000	58.70.001.600
90	GS-ST 8010-3	350	-	-	10/335/281 M 22 x 1,5	11,000	9,500	8,500	10,000	8,500	8,000	58.70.001.600

Brake axle stub GS-ST with cam brake and solid axle beam

60	GS-ST 4006	350	238	N3006-3	6/205/160 M 18 x 1,5	4,500	3,800	-	4,200	3,500	-	58.56.443.600
70	GS-ST 5506	350	238	N3006-3	6/205/160 M 18 x 1,5	7,000	6,000	5,500	6,500	5,500	5,000	58.63.443.600
70	GS-ST 5506	350	238	N3108-3	6/205/160 M 18 x 1,5	7,000	6,000	5,500	6,500	5,500	5,000	58.63.454.600
80	GS-ST 7006	350	238	N3108-3	6/205/160 M 18 x 1,5	9,000	7,500	7,000	8,000	7,000	6,500	58.67.454.600
80	GS-ST 7008	350	238	N3108-3	8/220/275 M 20 x 1,5	9,000	7,500	7,000	8,000	7,000	6,500	58.67.454.601
90	GS-ST 8008-1	350	238	N3108-3	8/220/275 M 20 x 1,5	11,000	9,500	8,500	10,000	8,500	8,000	58.70.454.600

Brake axle stub GS-ST with wing cam brake and hollow axle beam

120 x 10	GS-ST 11010-1	600	358	FL 4112	10/335/280 M 22 x 1,5	11,000	11,000	11,000	9,500	9,500	9,500	58.88.460.600-601
120 x 10	GS-ST 11010-1	735	358	FL 4112	10/335/280 M 22 x 1,5	11,000	11,000	11,000	9,500	9,500	9,500	58.88.460.602-603
120 x 10	GS-ST 11010-1	809	358	FL 4112	10/335/280 M 22 x 1,5	11,000	11,000	11,000	9,500	9,500	9,500	58.88.460.604-605
120 x 15	GS-ST 12010	695	358	FL 4112	10/335/280 M 22 x 1,5	14,000	14,000	14,000	12,500	12,500	12,500	58.72.460.600-601
120 x 10	GS-ST 11010-1	590	388	FL 4118	10/335/280 M 22 x 1,5	11,000	11,000	11,000	9,500	9,500	9,500	58.88.449.600-601
120 x 15	GS-ST 11010-1	590	388	FL 4118	10/335/280 M 22 x 1,5	14,000	12,500	11,000	12,500	11,500	10,000	58.88.449.602-603
120 x 10	GS-ST 11010-1	650	388	FL 4118	10/335/280 M 22 x 1,5	11,000	11,000	11,000	9,500	9,500	9,500	58.88.449.604-605
120 x 15	GS-ST 11010-1	650	388	FL 4118	10/335/280 M 22 x 1,5	14,000	12,500	11,000	12,500	11,500	10,000	58.88.449.606-607
150 x 10	GS-ST 12010	490	388	FL 4118	10/335/280 M 22 x 1,5	15,000	15,000	14,000	15,000	15,000	13,000	58.72.449.600-601